




## 150 WATT LED STREET LIGHT

### 150 Watt Luminance Distribution Plot



### 150 Watt Asymmetric Distribution Plot

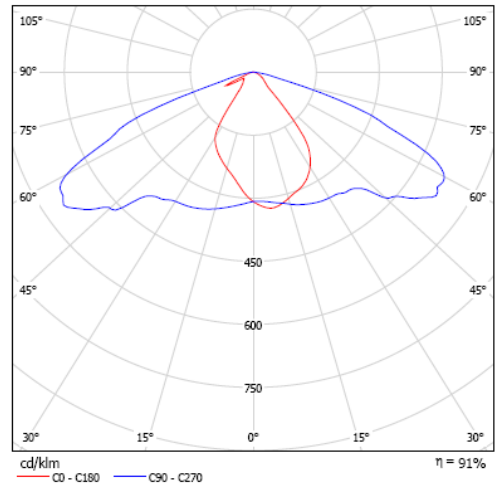

<b>Raptor Part Number</b>	<b>R-L12-LA.A-150-RNIM</b> <b>R-L12-LA.A-150-RCIM</b>
<b>Feature</b>	Asymmetric Type Lens
<b>LED Type (R)</b>	Phillips/Rebel
<b>Color Temperature (N) or (C)</b>	(N) 3500~4500K (C) 4500~6500K
<b>Driver Location (I)</b>	Internal Driver
<b>Driver Manufacturer (M)</b>	Mean Well
<b>Input Voltage</b>	AC 100~240 Volts AC 277 Volts
<b>Frequency Range</b>	50~60 Hz
<b>Number of LEDs</b>	108 Pcs / 1 Watt each
<b>Total Power Consumption</b>	150 Watts
<b>Lumens</b>	10200 Lm / 60 Lm/W
<b>U<sub>max</sub></b>	(Height = 33 Ft): $\geq 27.00$ Lux (Height = 39 Ft): $\geq 19.00$ Lux
<b>U<sub>e</sub> (40*20M)</b>	(Height = 33 Ft): $\geq 8.52$ Lux
<b>U<sub>o</sub></b>	(Height = 33 Ft): $\geq 0.40$
<b>U<sub>L</sub></b>	(Height = 33 Ft): $\geq 0.60$
<b>CRI</b>	>70
<b>Power Factor</b>	>0.9
<b>Operation Temperature</b>	-22°F~122°F
<b>Operation Humidity</b>	10%~90%
<b>Storage Temperature</b>	-40°F~176°F
<b>LED Life</b>	20,000+ Hours
<b>Material</b>	Aluminum Base & Tempered Glass
<b>Dimensions Inches</b>	20.5" L x 10.9" W x 4.5" H
<b>Weight</b>	21.2 lbs
<b>IP Rating</b>	IP65

### Outline Dimensions

